


LMC-ML-M1616UR

UR series







レンズ形式	Lens Type	Specifications	
フォーカス位置	Focus Position	Reference Magnification	M.O.D
光学倍率	Magnification	0.031	0.095
焦点距離 (mm)	Focal Length	16.16	16.16
Fno	Fno	1.60～16.00	
NA	Numerical Aperture	-	-
WD/OD (mm)	Working/Object Distance	500.0 / 507.0	150.0 / 157.0
O/I (mm)	Object to Image Distance	554.26	205.30
鏡筒長 (mm)	Mechanical Tube Length	35.50～37.00	
レンズバック (mm)	Lens Back	12.16	13.20
被写界深度 (mm)	DOF @PCoC ϕ 0.04mm	131.893	14.387
分解能 (μ m)	Resolution @ λ =550nm	-	-
前側/後側主点位置 (mm)	Front/Rear Principal Position	28.44 / -4.50	28.44 / -4.50
入射/出射瞳位置 (mm)	Entrance/Exit Pupil Position	18.85 / -28.07	18.85 / -28.07
入射/出射瞳径 (mm)	Entrance/Exit Pupil Diameter	10.18 / 25.02	10.18 / 25.02
画角 (deg.) H x V	Angle Of View	30.37 x 22.92	29.62 x 22.39
TVディストーション (%)	TV Distortion	-0.472	-0.674
周辺光量比 (%)	Relative Illumination	32.75	36.61
質量 (g)	Weight	50	
マウント	Mount	C mount	
イメージサークル径 (mm)	Image Circle	ϕ 11	
最大適合カメラ	Largest Compatible Camera	2/3 Inch	

LMC-ML-M1616UR

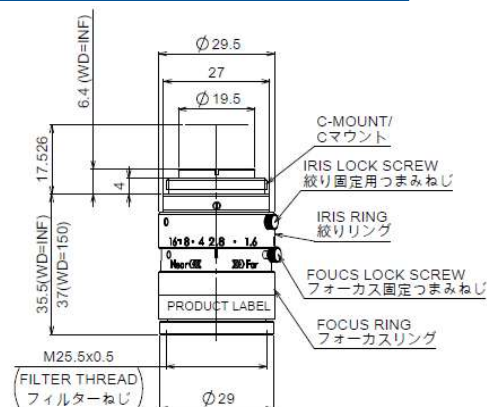

WD=500.0mm Fno2.8

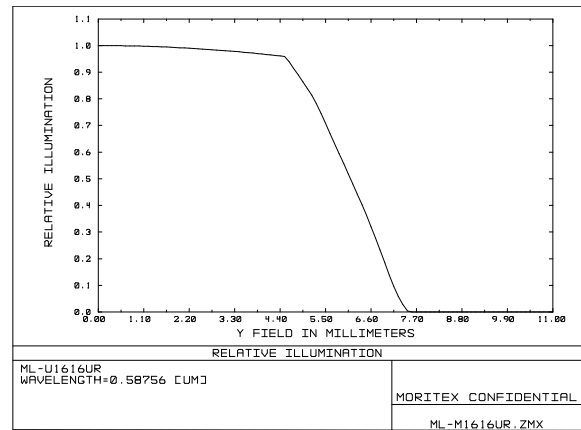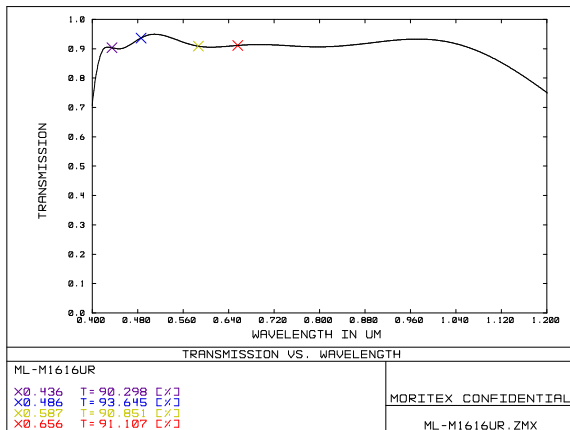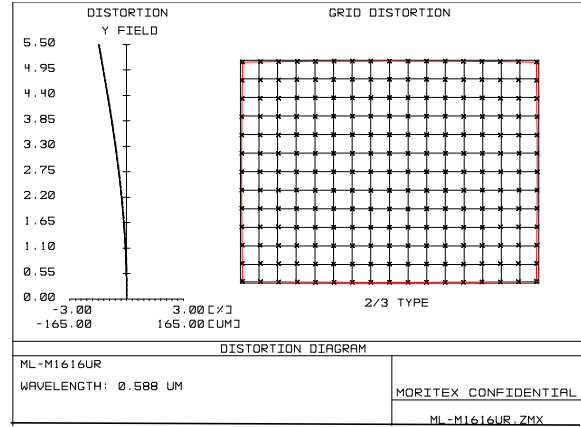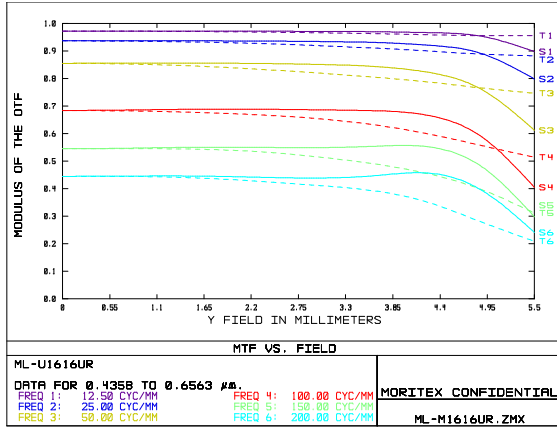

MORITEX Corporation





Technology center Lens design & Development technology

TEL +81 (0)48-218-2536 moritex.mvs@moritex.com

FAX +81 (0)48-462-6713 www.moritex.com

MORITEX
A Cognex Company

WD=300.0mm Fno2.8

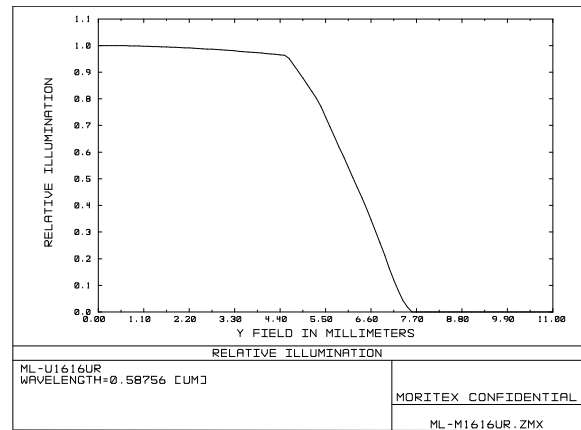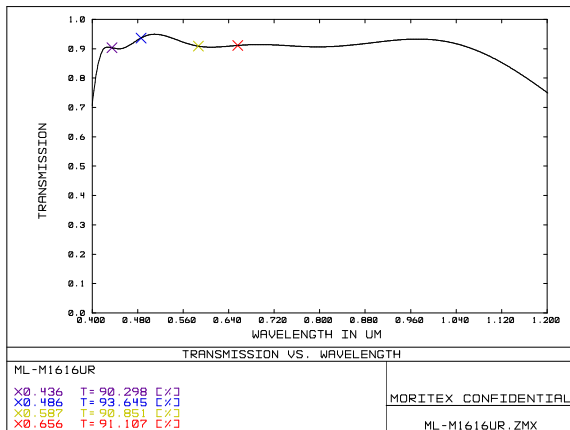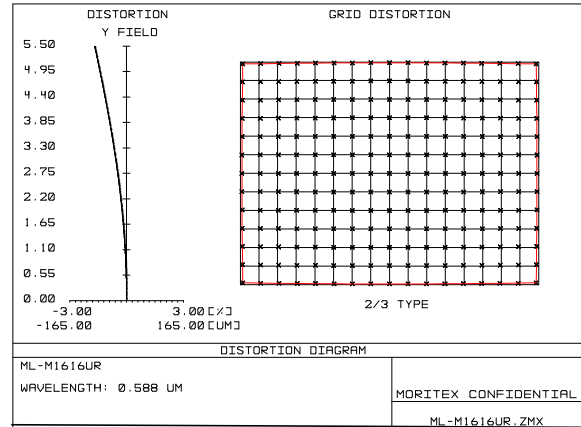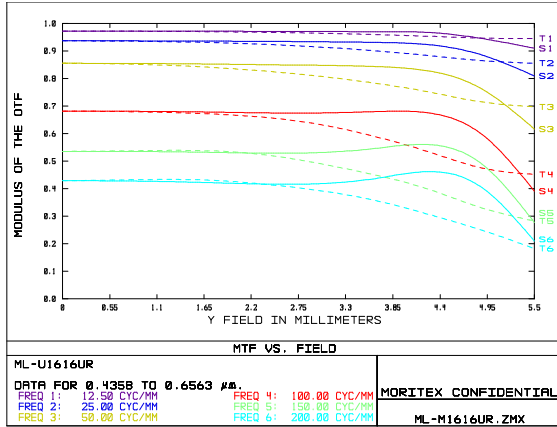

MORITEX Corporation





Technology center Lens design & Development technology

TEL +81 (0)48-218-2536 moritex.mvs@moritex.com

FAX +81 (0)48-462-6713 www.moritex.com

MORITEX
A Cognex Company

WD=150.0mm Fno2.8

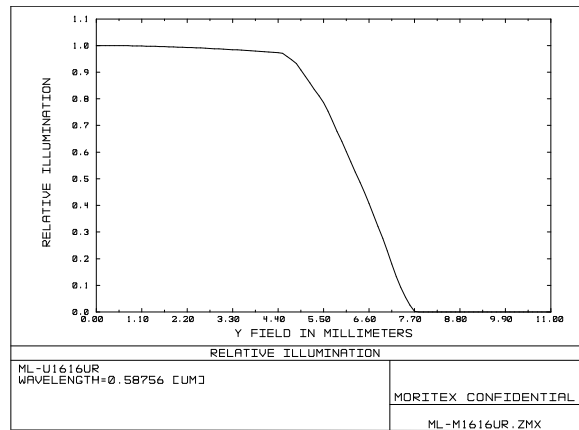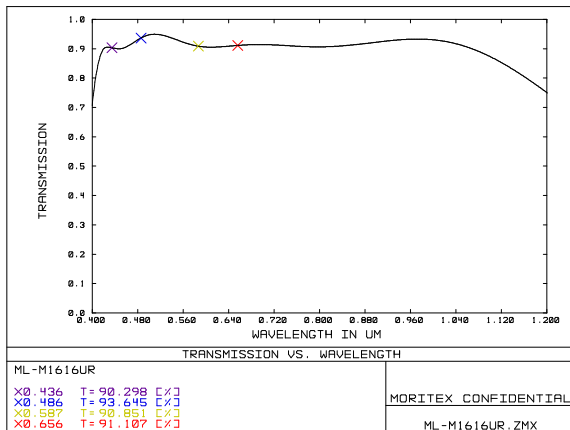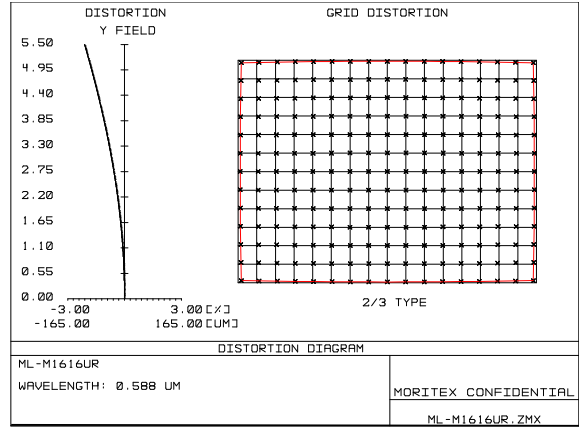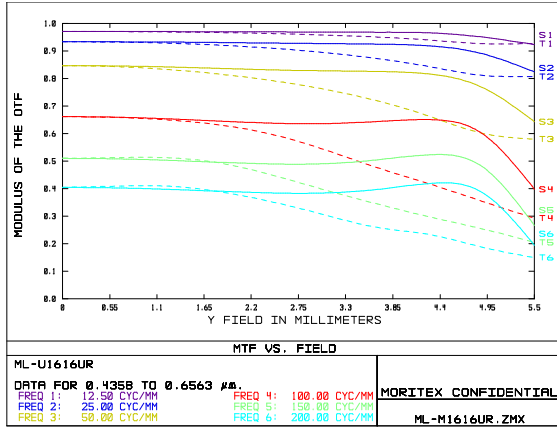

MORITEX Corporation

Technology center Lens design & Development technology

TEL +81 (0)48-218-2536 moritex.mvs@moritex.com

FAX +81 (0)48-462-6713 www.moritex.com

MORITEX
A Cognex Company